


NAFFCO-PSV-WR1.5 Wrap Strip

Fire protection fabric



Control Number: NFC-DS-PFWR1.5/A/19

Subject to errors, typographical errors and modifications. The specified details reflect the state of the art / the effective standard at the time of printing (01/2019). Please let us know when you need information about the legal and technical requirements or the manufacturer's specification that apply to your specific case. © Copyright NAFFCO. NAFFCO-PSV-WR1.5 WRAP STRIP is a registered trademark © of NAFFCO.

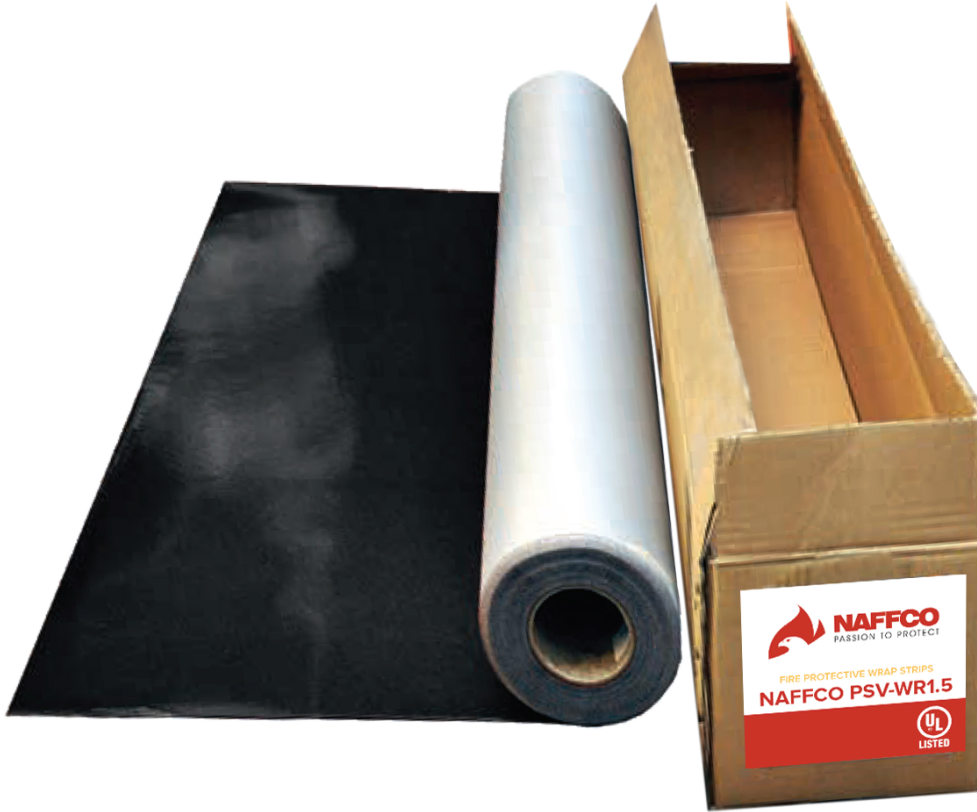

Product description

Fields of application

Fire Protection fabric used in various applications thus as
(a) joint sealing systems and
(b) wrap for cables, combustible pipes and non-combustible pipes with combustible insulation.

Product features

NAFFCO-PSV-WR1.5 is a flexible composite fibre glass fabric with grey external PU coating and internal anthracite-coloured intumescent coating. The product is flexible, weather resistant and resistant to UV radiation. When exposed to fire or extensive heat, it forms a microporous, thermally insulating layer of foam. The gaps between building elements and/or the gap between cables and cable bandage will be closed and thus prevents a spread of fire.

Applicability certificate

Tested and approved according to national and international standards e.g.: UL

Pipes

Cables

NAFFCO-PSV-WR1.5 Wrap Strip



Technical Data

Handling

- Processing temperature + 5°C - max. +50 °C; < + 5°C Loss of flexibility; < 85% relative air humidity
- (Pre-) cut with ordinary cutting tools, e.g. scissors or utility knives.

Ordering information

Length: 10 m rolls
Width: 75mm, 125mm, 150mm, 200mm, 1,100mm - others on request
Colour: anthracite
Nominal thickness: 1.5mm

Storage

Dry indoor storage (< +50 °C)
Protect the product against compression load

Safety instructions

Please refer to our MSDS (safety data sheet).

Technical data

Colour	grey external / anthracite internal
Form	Fabric coated with a intumescent fire protection paint internally
Weight per unit area	approx. 2,000 g/m ²

Applied systems

- NAFFCO-PSV-PC
- NAFFCO-PSV-PS MORTAR
- NAFFCO-PSV-PH MORTAR

In case of any questions please contact our technical support team.
For full product documentation and other information please visit our website www.naffcoflow.com

The information provided herein reflects the current state of our technical testing and experience with the use of this product. However, the buyer/user is hereby not relieved of their duty, at their own responsibility, to properly examine our materials for their suitability for the intended use based on the respective site conditions. Legal claims for damages arising from the use of this product for purposes other than, or in a manner that differs from, the description contained herein without our prior written approval are precluded and may not be asserted against us. In light of the circumstance that we have no influence over site conditions and various factors that could influence the performance and use of our product, a guarantee of results or liability, regardless of legal grounds, cannot be derived from this information or from verbal consultation provided by one of our employees unless we may be accused of intent or gross negligence. Our General Terms and Conditions apply for all other purposes. The most recent version of our technical data sheet is valid and may be requested from the NAFFCO Flow Control or downloaded at www.naffcoflow.com



NAFFCO
PASSION TO PROTECT
Email: info@naffco.com

In line with NAFFCO policy for continuous product development,
NAFFCO has the right to change specifications without prior notice.