


Threaded Rod

Model: SD-TR

- Designed for use as a double end studs with a nut on either side or as studs.
- Right handed.
- Coarse threads.
- Commercial Nut Fit

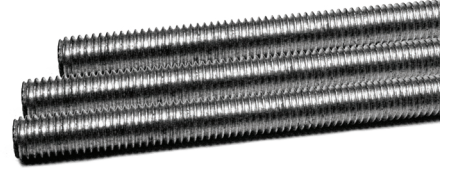


Product Specifications:

Material	Mild Steel
Standards	DIN 975, DIN 976-1, Steel - Property Class 4.8
Application	Water, HVAC & Fire-Fighting
Coating Finish	Zinc Plated

Threaded Rod

Product Dimensions:

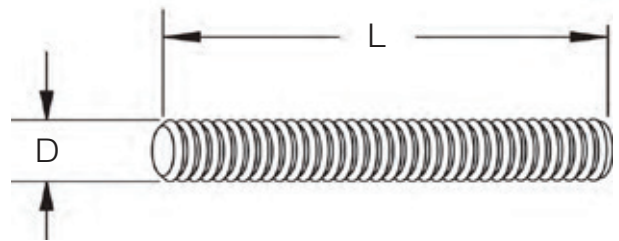

Threads (D)	Coarse & Fine Thread length (L) = 1000mm, 2000mm & 3000mm										
	mm	M4	M5	M6	M7	M8	M8	M10	M10	M12	M12
Diameter	Inch	0.157	0.197	0.236	0.276	0.315	0.315	0.315	0.394	0.472	0.472
Pitch	mm	0.700	0.800	1.000	1.000	1.000	1.250	1.250	1.500	1.250	1.750
Threads (D)	mm	M14	M16	M16	M18	M20	M20	M22	M24	M27	M30
Diameter	Inch	0.551	0.630	0.630	0.709	0.787	0.787	0.866	0.945	1.063	1.181
2.000	mm	2.000	1.500	2.000	2.500	1.500	2.500	2.500	3.000	3.000	3.500
Threads (D)	mm	M33	M36	M39	M42	M45	M48	M52	M56	M60	M64
Diameter	Inch	1.299	1.417	1.535	1.654	1.722	1.890	2.047	2.205	2.362	2.520
Pitch	mm	3.500	4.000	4.000	4.500	4.500	5.000	5.000	5.500	5.500	6.000

- Note:
- Measurement are subjects to 5% tolerance.
 - Other sizes available on request.
 - Left Handed is available upon request.
 - Hot Dipped Galvanized can be supplied upon request.

Threaded Rod

Miscellaneous Data:

1. Ordering Information

Example: SD-TR-1

- SD-TR is the part number
- (1) Zinc Plated

2. Contact Information

For further information on any aspect of the SHIELD Pipe Supports please contact below:

MIDDLE EAST & AFRICA	UNITED KINGDOM
Jebel Ali Free Zone, Dubai, UAE P.O Box: 61199 Tel.: +971 4 881 2070 Fax: +971 4 881 2198 Email: shieldme@shielglobal.com	Unit 3, Endeavor Drive, Basildon-Essex, SS3 14WF Tel.: +44 1708 377731 Fax: +44 1708347637 Email: shielduk@shielglobal.com