



# Clevis Hanger

## Model: SD-HC

Designed for the suspension of non-insulated stationary pipe lines. To use as pipe support-line with NFPA 13 requirements.




## Product Specifications:

Available Size	1/2" - 36"
Material	Low Carbon Steel
Standards	ASTM B633, ISO 10683
Application	Water, HVAC & Fire-Fighting
Coating Finish	Pre-Galvanized coil adheres to ASTM A653 G90 Low Carbon Steel - Electro Galvanized to ASTM B633 Low Carbon Steel - Hot Dipped Galvanized to ASTM A123 Low Carbon Steel - Zinc Flake Coating to ISO 10683
Approvals/Listings	Federal Specification WW-H-171E & A-A-1192 (Type 1) Manufacturer's Standardization Society MSS SP-69 & SP-58 (Type 1) UL Listed & FM Approved   

# Clevis Hanger

## Product Dimensions:

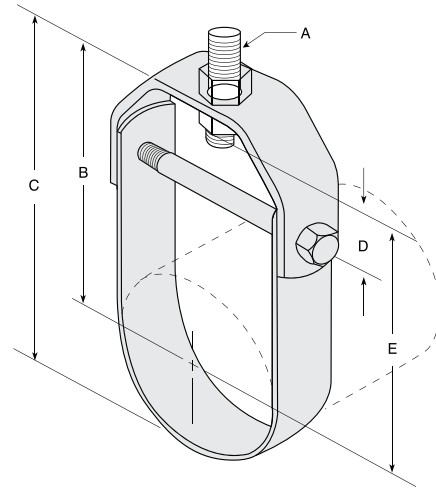

Pipe Size Inch	Rod Size	Adjustment				Cross Bolt	Test Load
	A Inch	B Inch	C Inch	D Inch	E Inch	lbs.	Lb-f.
1/2	3/8	2 7/16	2 7/8	1 1/8	2	1/4	750
3/4	3/8	2 5/8	3 1/8	1 1/4	2 3/16	1/4	750
1	3/8	3 1/16	3 3/4	1 5/8	2 5/16	1/4	750
1 1/4	3/8	3 3/8	4 9/16	1 5/8	2 15/16	1/4	750
1 1/2	3/8	3 1/2	4 7/16	1 1/2	3 1/16	1/4	750
2	3/8	3 3/4	5	1 5/8	3 5/16	1/4	750
2 1/2	1/2	3 7/8	5 3/8	1 3/8	3 1/4	3/8	940
3	1/2	4 1/4	6	1 3/8	3 3/8	3/8	1060
3 1/2	1/2	4 1/2	6 1/2	1 1/4	3 3/8	3/8	1250
4	5/8	5 1/2	7 11/16	1 3/4	4 11/16	3/8	1500
5	5/8	6 1/8	9 1/8	1 7/8	5 5/16	1/2	2000
6	3/4	6 7/8	10 1/8	1 5/8	6	1/2	2650
8	7/8	8 3/4	12 7/8	2 1/8	7 7/8	5/8	4050

- Note:
- Use of an upper locknut ensures proper performance.
  - "D" Adjustment (Top of cross bolt to bottom of hanger rod nut)
  - When an over-sized clevis is used, a pipe spacer should be placed over the clevis bolt to prevent the lower U-strap from moving inward.
  - Clevis hanger is also available in SS material upon request.

# Clevis Hanger

## Miscellaneous Data:

### 1. Ordering Information

Example: SD-HC-1-4

- SD-HC is the part number
- (1) Electro-Galvanized Coating (2) Hot Dipped Galvanized Coating (3) Zinc Flake Coating (4) Pre-Galvanized
- (4) Size

### 2. Contact Information

For further information on any aspect of the SHIELD Pipe Supports please contact below:

MIDDLE EAST & AFRICA	UNITED KINGDOM
Jebel Ali Free Zone, Dubai, UAE P.O Box: 61199 Tel.: +971 4 881 2070 Fax: +971 4 881 2198 Email: shieldme@shielglobal.com	Unit 3, Endeavor Drive, Basildon-Essex, SS3 14WF Tel.: +44 1708 377731 Fax: +44 1708347637 Email: shielduk@shielglobal.com