


Riser Hanger/Clamp

Model: SD-GE-PRC

- Designed to act a rigid support/guide for vertical pipes to control the suspension in pipeline.
- Equally useable in most of the pipe types.
- Strengthened bolts for high load capacity.




Product Specifications:

Available Size	1/2" - 12"
Material	Mild Steel
Standards	ASTM B633
Application	Water, HVAC & Fire-Fighting
Coating Finish	Electro-Galvanized as per ASTM B633 Standards
Approvals/Listings	<p>Federal Specification WW-H-171E & A-A-1192A (Type 8) Manufacturers Standardization Society ANSI/MSS SP-69 & SP-58 (Type 8) FM Approved</p> 

Riser Hanger/Clamp

Product Dimensions:

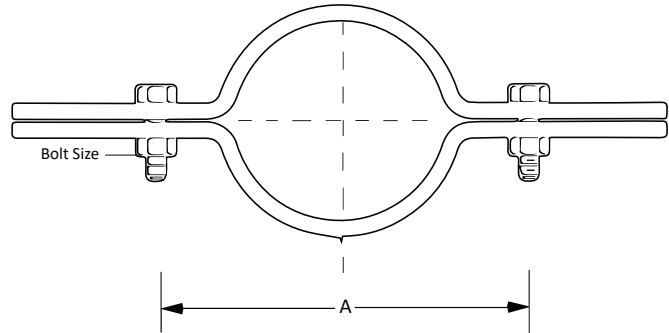

Size	Pipe O.D	A	Bolt Size	Max. Load
Inch	mm	mm	mm	Kg
½	21.3	57	M10	1250
¾	26.7	68	M10	1250
1	33.4	76	M10	1250
1¼	42.2	90	M10	1250
1½	48.3	110	M10	1250
2	60.3	130	M10	1850
2½	73.0	142	M12	1850
3	88.9	161	M12	2250
4	114.3	190	M12	3600
6	168.3	258	M16	4500
8	219.1	333	M16	4500
10	273.0	409	M16	5800
12	323.8	467	M20	7300

- Note:
- Measurements are subject to 5% tolerance.
 - Other Sizes available on request.
 - Hot Dipped Galvanized can be supplied upon request.

Riser Hanger/Clamp with Lining

Miscellaneous Data:

1. Ordering Information

Example: SD-GE-PRC-1-4

- SD-GE-PRC is the part number
- (1) Electro-Galvanized Coating
- (4) Size

2. Contact Information

For further information on any aspect of the SHIELD Pipe Supports please contact below:

MIDDLE EAST & AFRICA	UNITED KINGDOM
Jebel Ali Free Zone, Dubai, UAE P.O Box: 61199 Tel.: +971 4 881 2070 Fax: +971 4 881 2198 Email: shieldme@shielglobal.com	Unit 3, Endeavor Drive, Basildon-Essex, SS3 14WF Tel.: +44 1708 377731 Fax: +44 1708347637 Email: shielduk@shielglobal.com